



LAMI CORPORATION INC.



JAPAN

Lami Hot Series

Lami Hot Series


Roll Type Laminator



IRIS series

Outstanding operability and finishing, possible to "HOT" & "COLD" lamination

"IRIS" series can correspond to various sizes and easy laminating can be done with simple operability.
It also has the ability to speed up and to be able to do cold laminator.

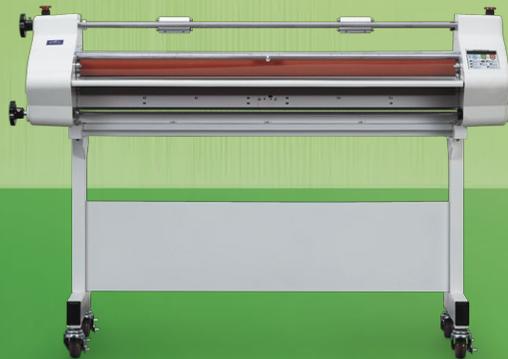

IRIS-44LK

Electrical roller Up & Down function laminator.
It is long-best seller model in Japan.

HOT&
COLD

ROLL

Max.
width
B0

Max.
thickness
4 mm



IRIS-29LK

Equipped with "Simple pressure lever" and
"Easy operation" by LCD panel.
Heavy volume lamination can be done stable.

HOT&
COLD

ROLL

Max.
width
A1

Max.
thickness
3 mm





LAM CORPORATION INC.

01187 00 00 00 00 00 00 00

MEASURE	MEMORY	PRESS/RELEASE
FAN	COLD	REVERSE
STANDBY	RUN/STOP	

LINEUP

IRIS-44LK



IRIS-29LK



Max. laminating width	B0 (1,120 mm)	A1 (750mm)
Max. substrate thickness	4 mm* ¹	3 mm* ¹
Max. speed	3.0 m / min	1.9 m / min
Processing method	Internal heating system	Internal heating system
Processing temperature	Room temperature to 140°C	Room temperature to 140°C
Power supply	AC 230 V	AC 230 V
Power consumption	3,700 W	1,500 W
External dimensions [Width × Depth × Height] (mm)	1,599 × 596 × 1,105* ² (1,209)* ³	1,599 × 596 × 1,107* ² (1,209)* ³
Weight	140 kg	60 kg
Re-winding device	Standard attachment	Option

*¹ Corresponding laminating film 32 μ to 250 μ (2 inch). *² Including special casters. *³ Installing option.



Re-winding device

<Compatible models>
IRIS-44LK / IRIS-29LK



LAMI CORPORATION INC.

Inquiries

<http://www.lami-corporation.co.jp>



JAPAN